

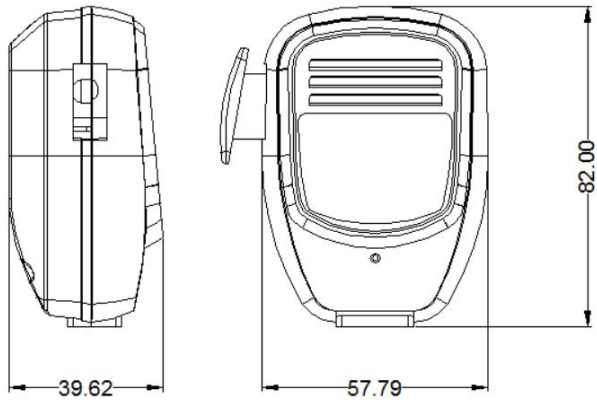
MC-HMC-04





1. Core Parameters

Item Parameter Description		Item Parameter Description
Audio	Receiving Sensitivity	0.25 μ V
	Rated Audio	500mW
	Spurious Rejection	70dB
	Audio Response	+1~-3dB
Conventional	Operating Voltage	5-12V
	Neighbourhood Channel Sensitivity	60dB@12.5kHz, 70dB@25kHz
	Operating Temperature	-30 $^{\circ}$ C~+60 $^{\circ}$ C
	Dimension	82*58*40mm

2. Product Size



3. Line Sequence Definition

	
Host Side (4pin male) 1 : Vcc-12V 2 : GND 3 : MIC-IN 4 : A-out(no amplifier)	Hand Marked End (4pin Female) 1 : Vcc-12V 2 : GND 3 : MIC-out 4 : A-in(amplifier)