

Audible and Visual Alarm

HW-VAR06

LED Speaker with audio broadcast, with wide-range power supply, 4 bright LED, Max. 10W speaker, and RS232 interface. Suitable for AI application like BSD.




Features

- Suitable for all kinds of trucks, buses and other vehicles
- Provides voice and audible/visual alarms
- RS232 serial communication
- Built-in vehicle-grade high-power speakers
- Built-in 4 bright LED lights, penetrate fog and rain.
- Support power supply DC voltage 9V-32V
- Customer can update the alarm sound
- Full metal zinc alloy shell
- Waterproof connector cable
- Stable and reliable, high temperature resistant

Specification

Model	HW-VAR06
Speaker Rated Power	5W
Maximum output power	10W
Speaker Input Sensitivity	500mV
Speaker Frequency Response Range	200Hz—12KHz
signal-to-noise ratio of speakers	80dB
Speaker loudness	95dB
LED light bulb	4
LED Power	4*1W
Glow angle	270°
communication interface	RS232
LED Colour	Two-colour (white + orange)
Waterproof Level	IP69K
Material	aluminium
Working Temperature	-30°—70
Storage Temperature	-40°C--85°C
Working Voltage	DC 9V—35V
Dimension	105mm(W)*140mm(H)*51.5mm <T>
Weight	709g
Main unit cable	7M cable length, one end 5Pin aviation connector, one end waterproof connector
Voice Configuration Cable	USB port; 30cm and tinned, cable length is 35cm

Dimension (Unit: mm)

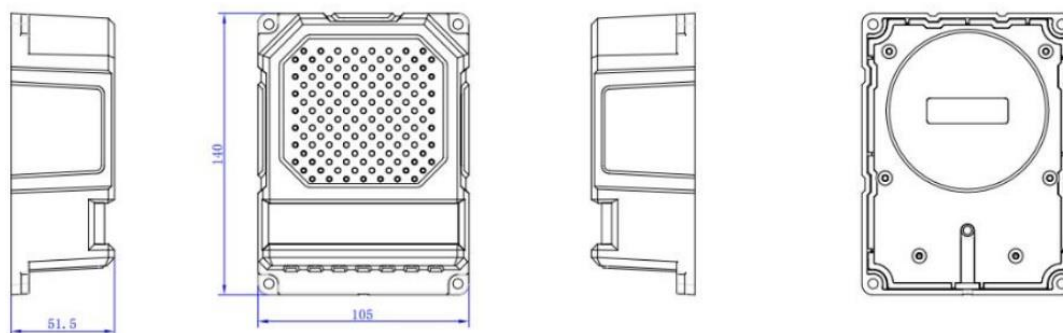

Appearance

